



Permanent Threshold Markings

5.74 Permanent threshold markings are used at the ends of sealed or concrete runways. Where the width of the runway is 30 m or more, this marking is always used; for runways less than 30 m wide, the marking may be used. It consists of a series of parallel longitudinal white lines resembling *piano keys*.



Figure 5-6 Runway threshold.

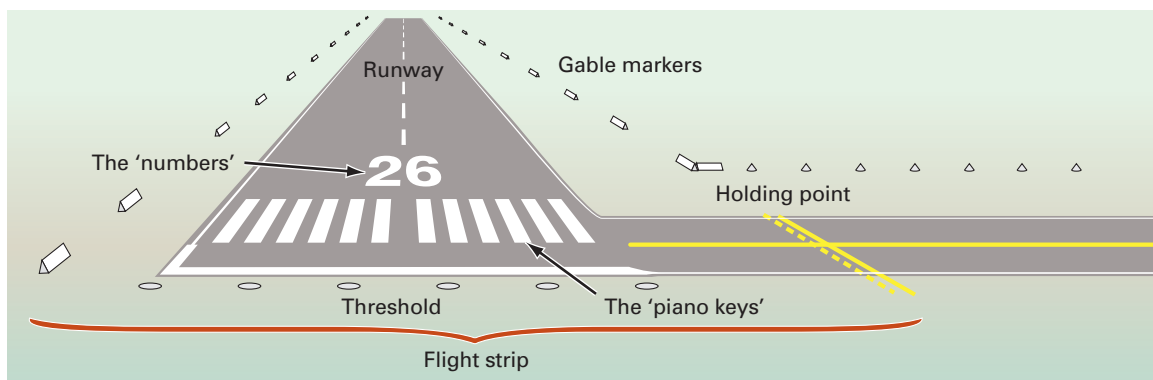


Figure 5-7 Runway and associated boundaries.

Displaced Threshold Markings

5.75 Sometimes the full length of the runway is not available – in which case a displaced threshold is marked. A permanently displaced threshold is indicated by arrows leading up to the displaced threshold marking.

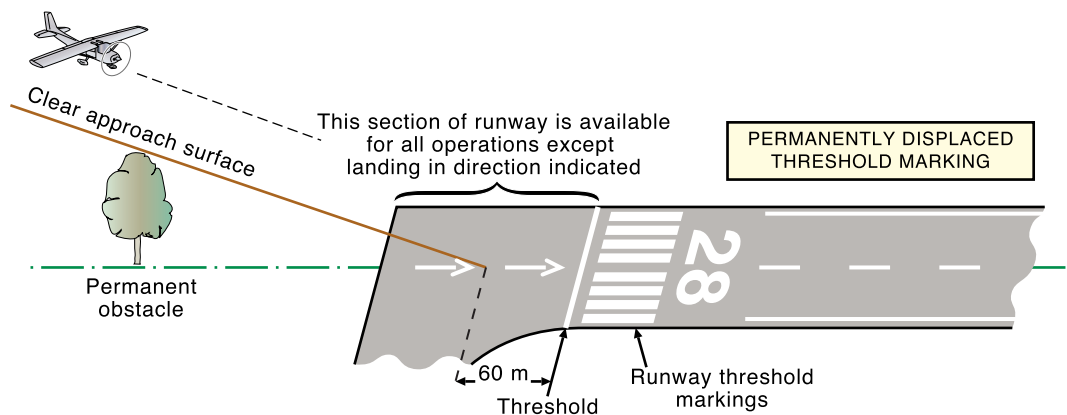


Figure 5-8 Permanently displaced threshold marking.